

CT750HO

4K CAMERA ASSIST

Broadcast monitor for 4K/Full HD camcorder & DSLR
Application for taking photos & making movies

1920x1200
Resolution

4K HDMI



A Better Camera Mate

CT750HO matches with world-famous 4K/FHD camera brands, to assist cameraman in better photography experience.



8bit Full HD Display

- 7" 16:10 8bit IPS LCD panel with 1920x1200 native resolution (324ppi), enjoy sharper, more detailed image with richer colors than ever before.
- 1000:1 high contrast, 500cd/m² high brightness and 170° wide viewing angles, for excellent viewing experience.

4K HDMI Input & Loop Output

- HDMI signal can loop output to the other monitor or device when HDMI signal input to CT750HO.



Camera Auxiliary Functions

CT750HO provides plenty of auxiliary functions for taking photos and making movies, such as peaking, false color and audio level meter.





- Peaking
- False color
- Histogram
- Exposure
- Level meter
- Image flip
- Pix to pix
- Grid
- Check field
- Zoom
- Underscan
- Image freeze
- Aspect ratio
- Center marker
- Screen marker

Compact & Light-weight Design

20.5mm thickness and 320g weight, which make great convenient for cameraman in outdoor or handheld applications.

Durable Protection

- Silicon rubber case with sun shade, providing an overall protection from drop, shock, sunlight and bright light environment.

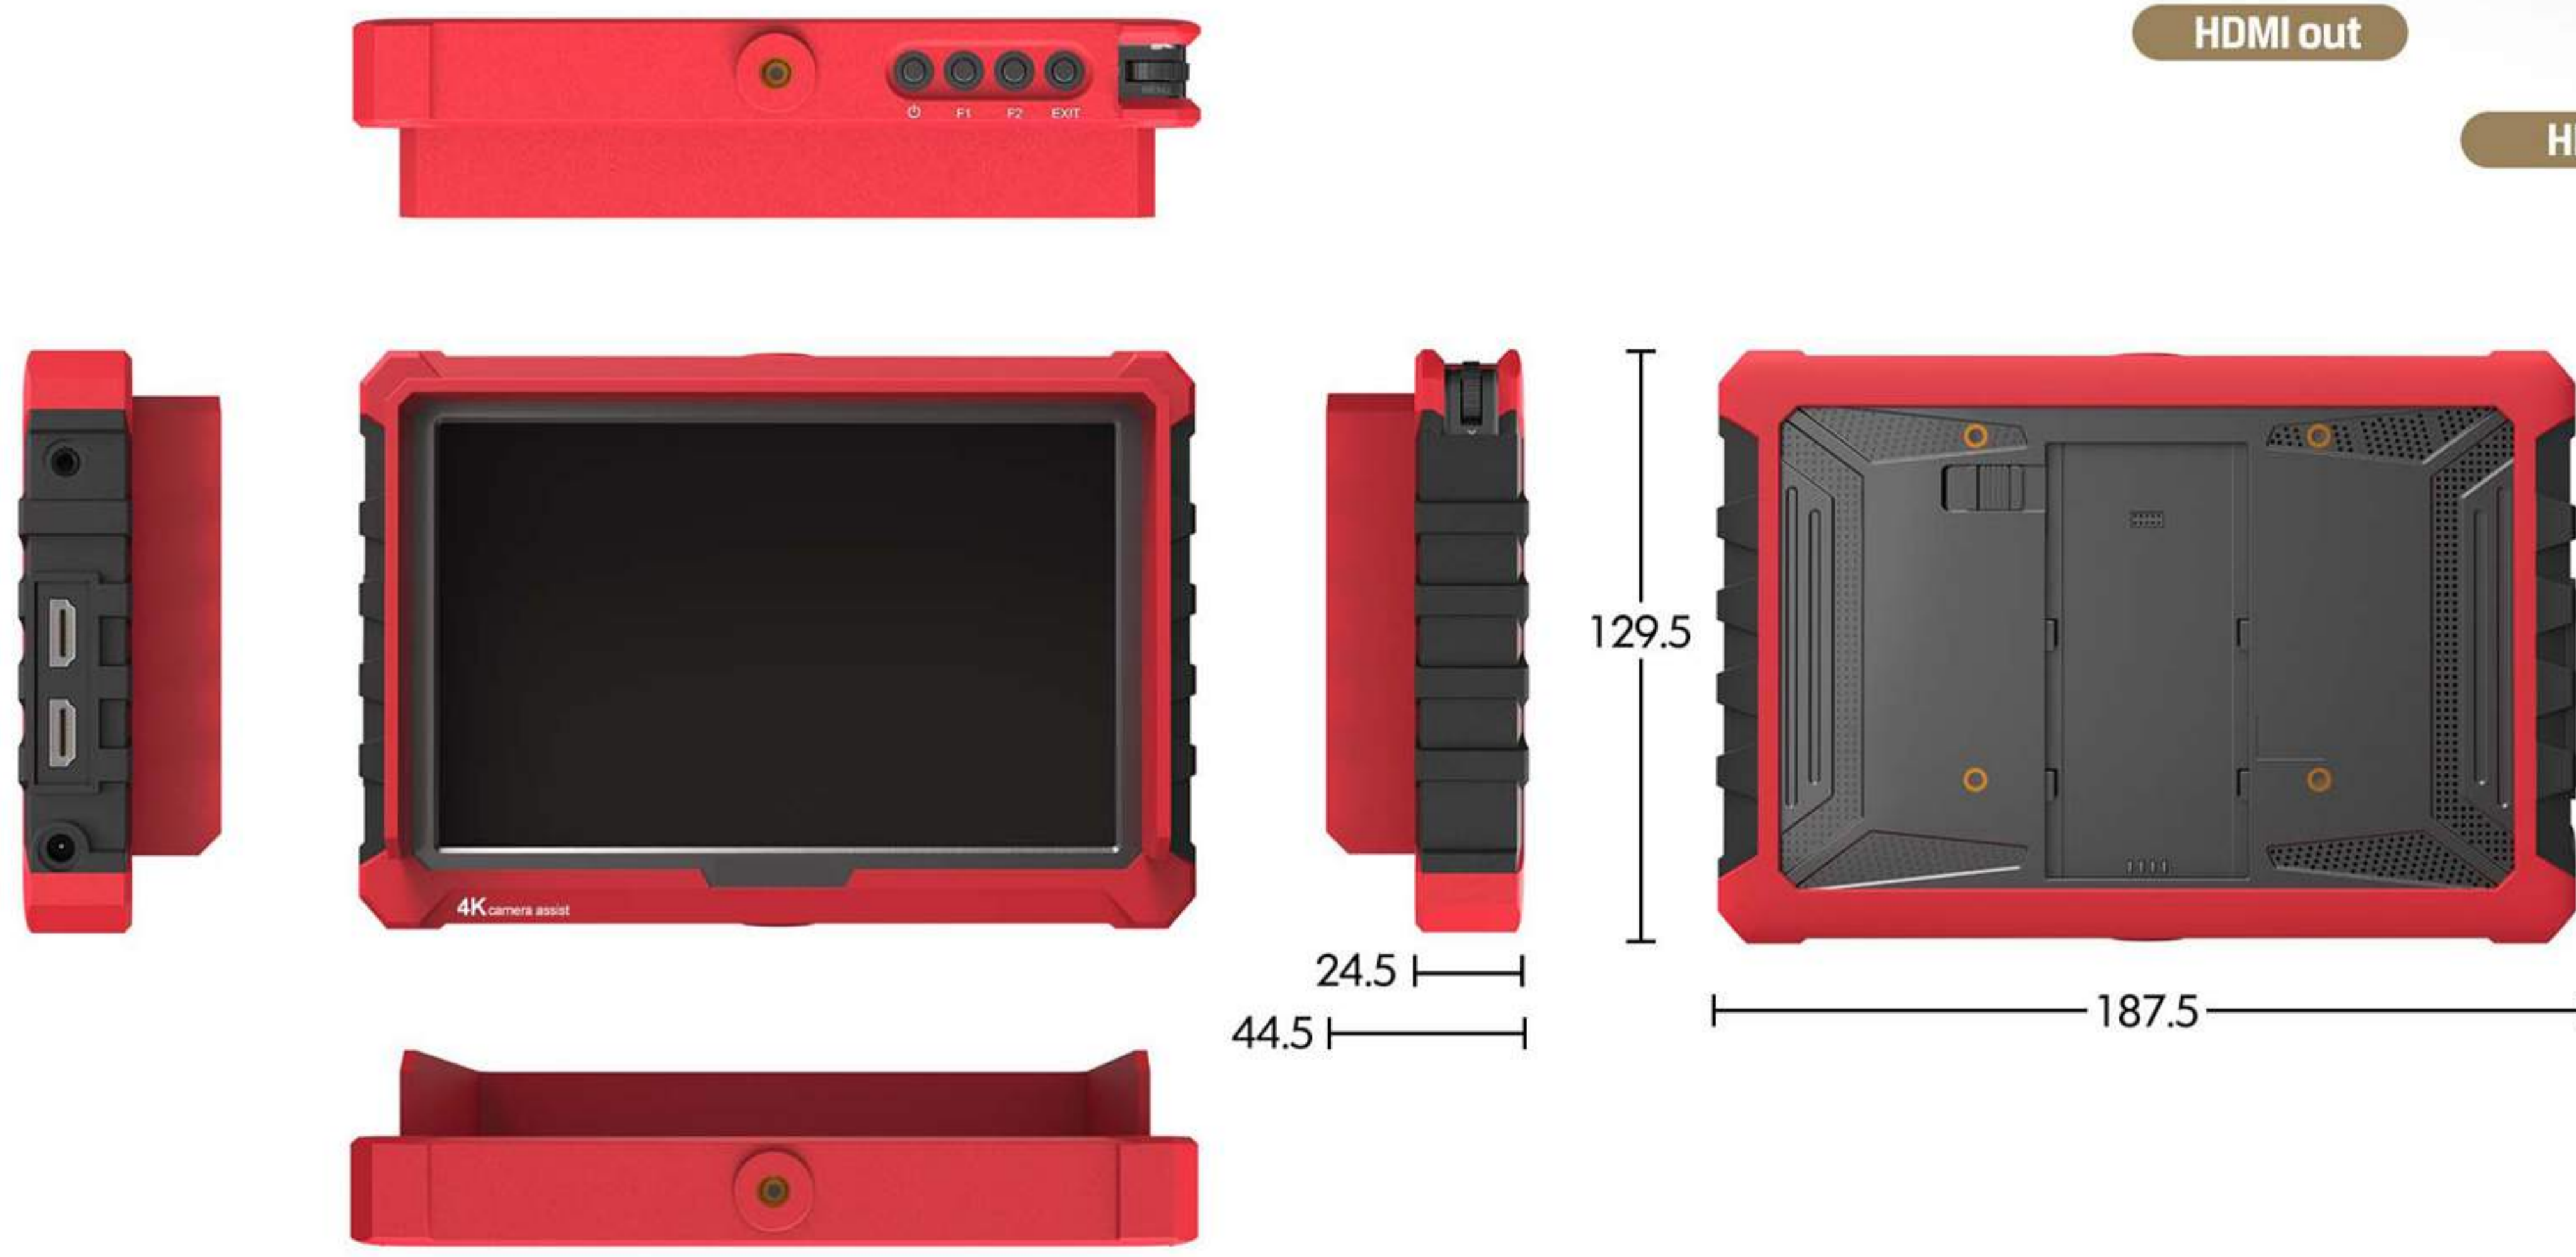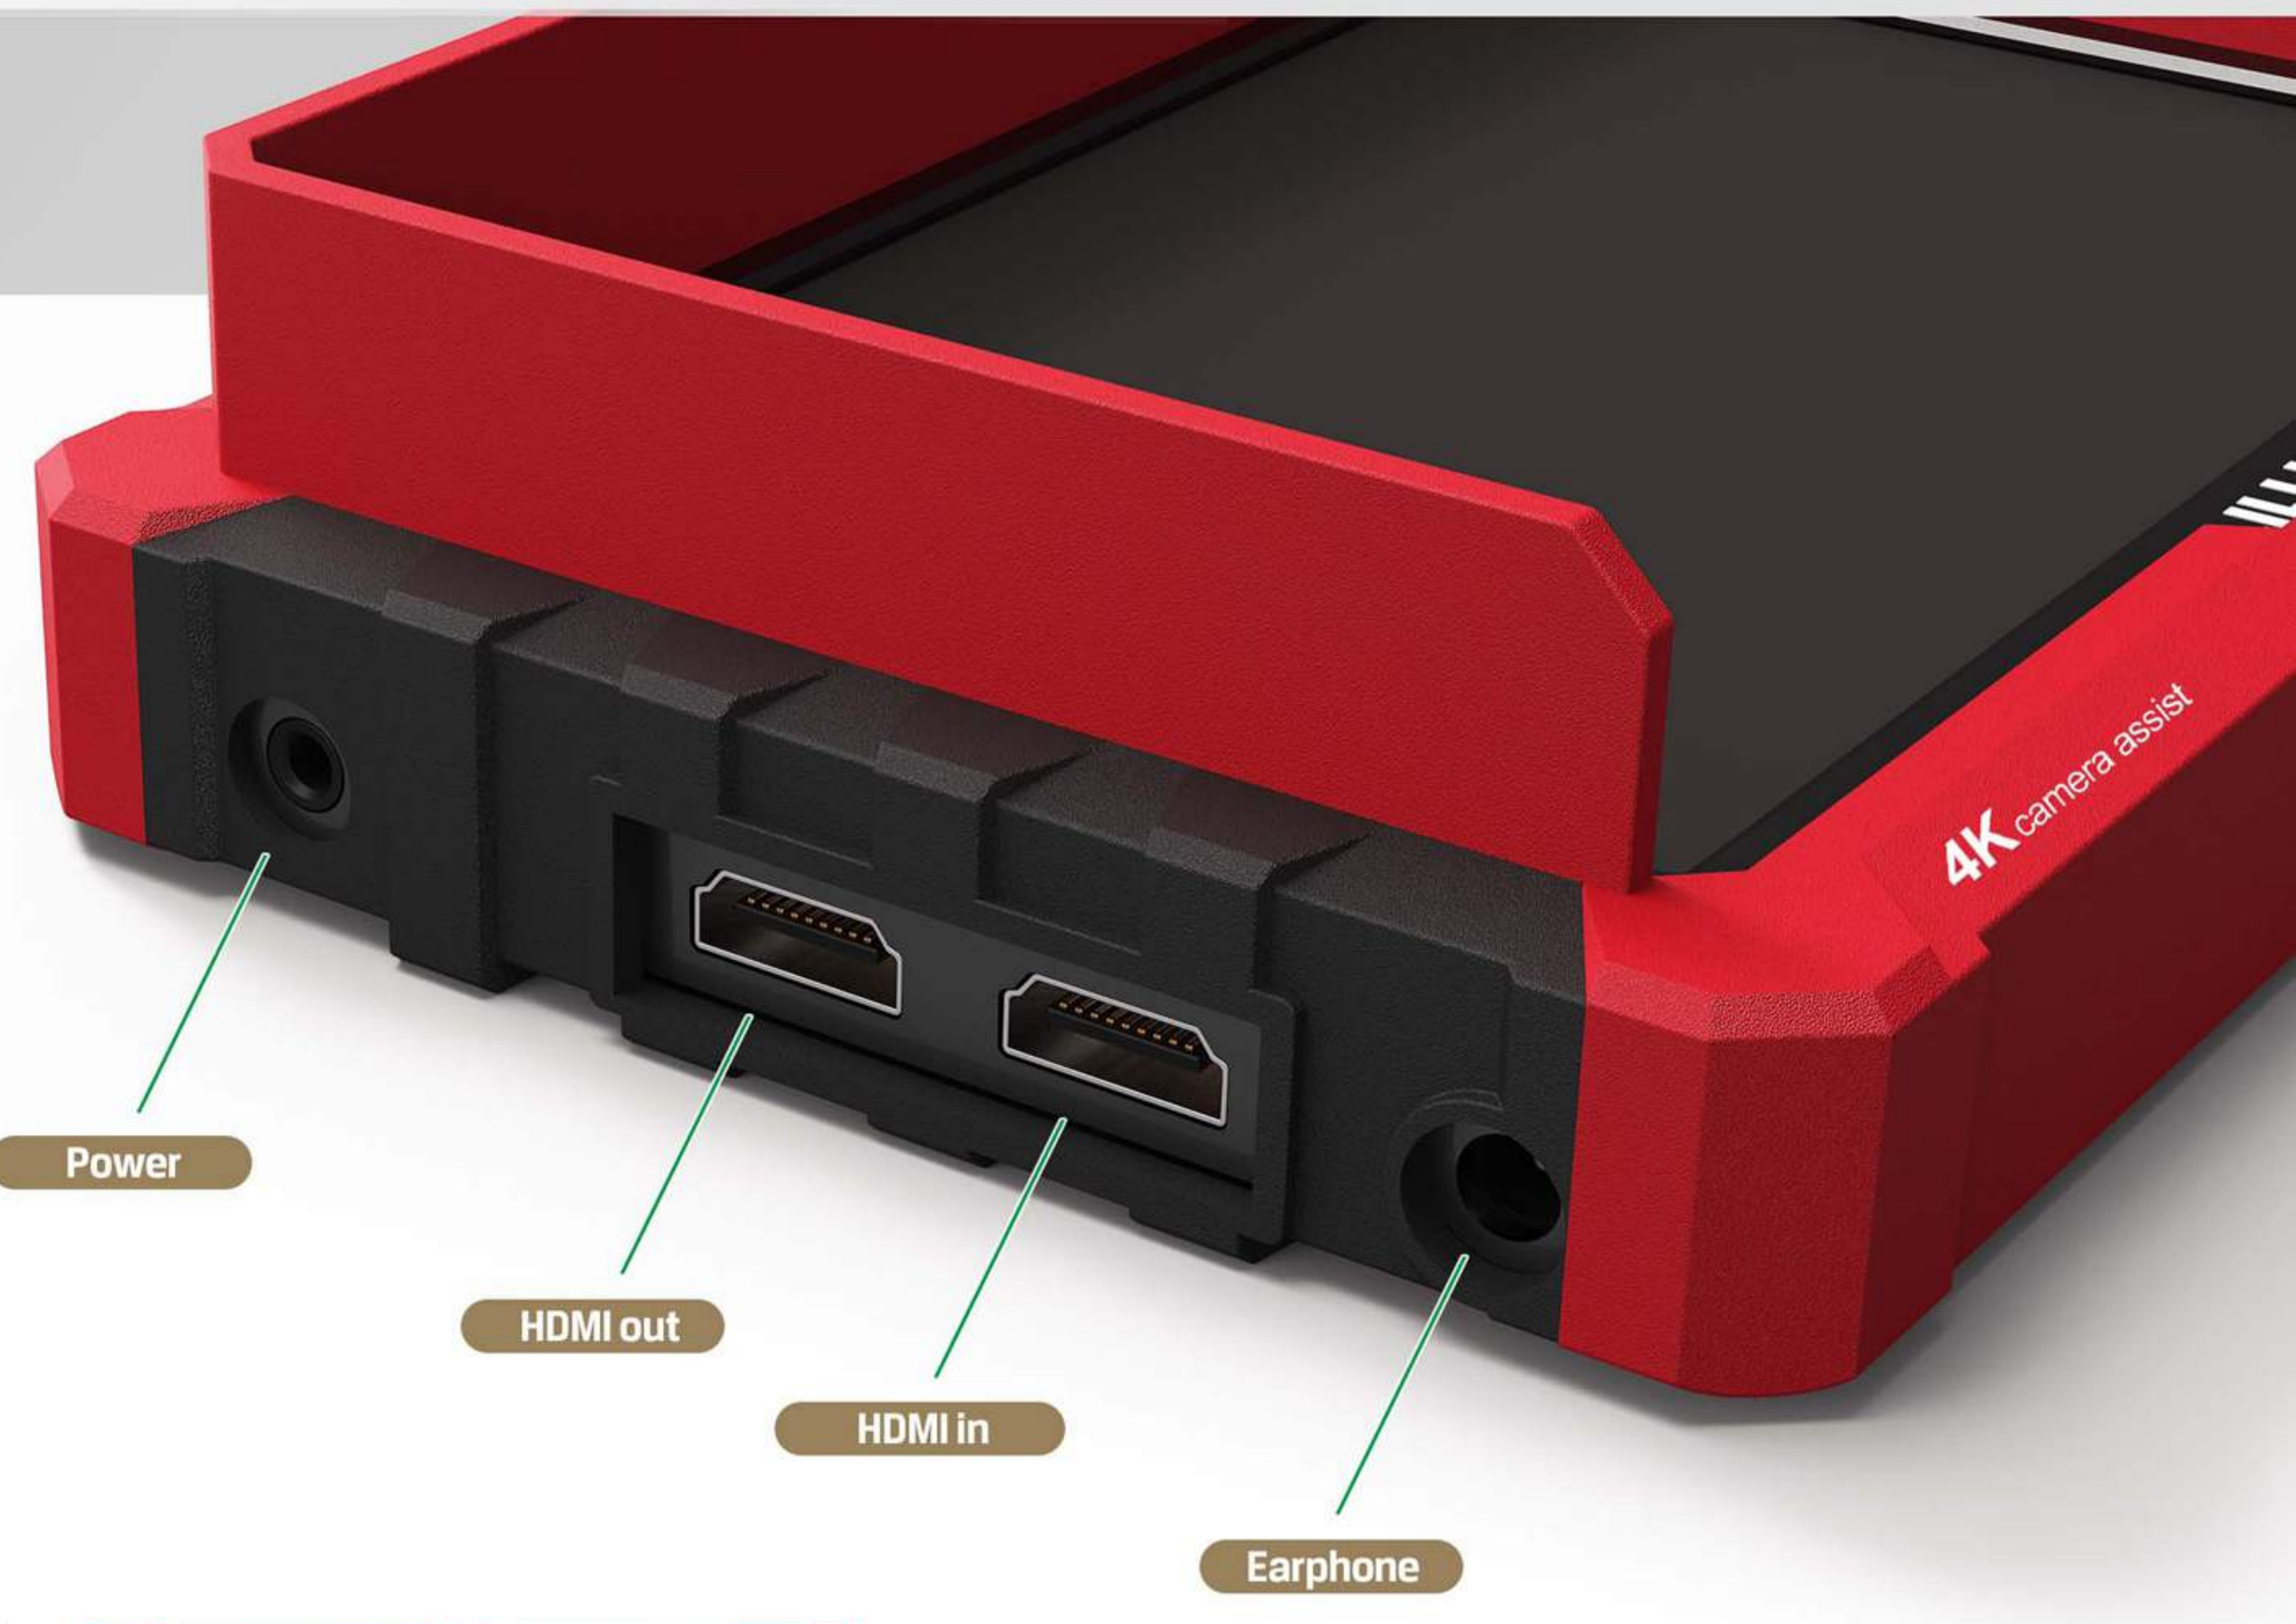


Easy-to-use

F1&F2 user-definable buttons to custom auxiliary functions as shortcut, such as peaking, underscan and checkfield. Use the Dial to select and adjust the value among of sharpness, saturation, tint and volume, etc.
75mm VESA and hot shoe mounts to fix CT750HO on the top of camera or camcorder.

SPECIFICATIONS | ACCESSORIES

DISPLAY	Display Screen	7" IPS
	Physical Resolution	1920x1200
	Aspect Ratio	16:10
	Brightness	500cd/m ²
INPUT OUTPUT	HDMI	1
	HDMI	1
AUDIO	Speaker	1
	Ear Phone Slot	1
POWER	Current	1A
	Input Voltage	DC 7-24V
	Battery Plate	F970
	Power Consumption	≤12W
ENVIRONMENT	Operating Temperature	-20°C~60°C
	Storage Temperature	-30°C~70°C
DIMENSION	Dimension (LWD)	182.1x124x20.5mm
	Weight	320g

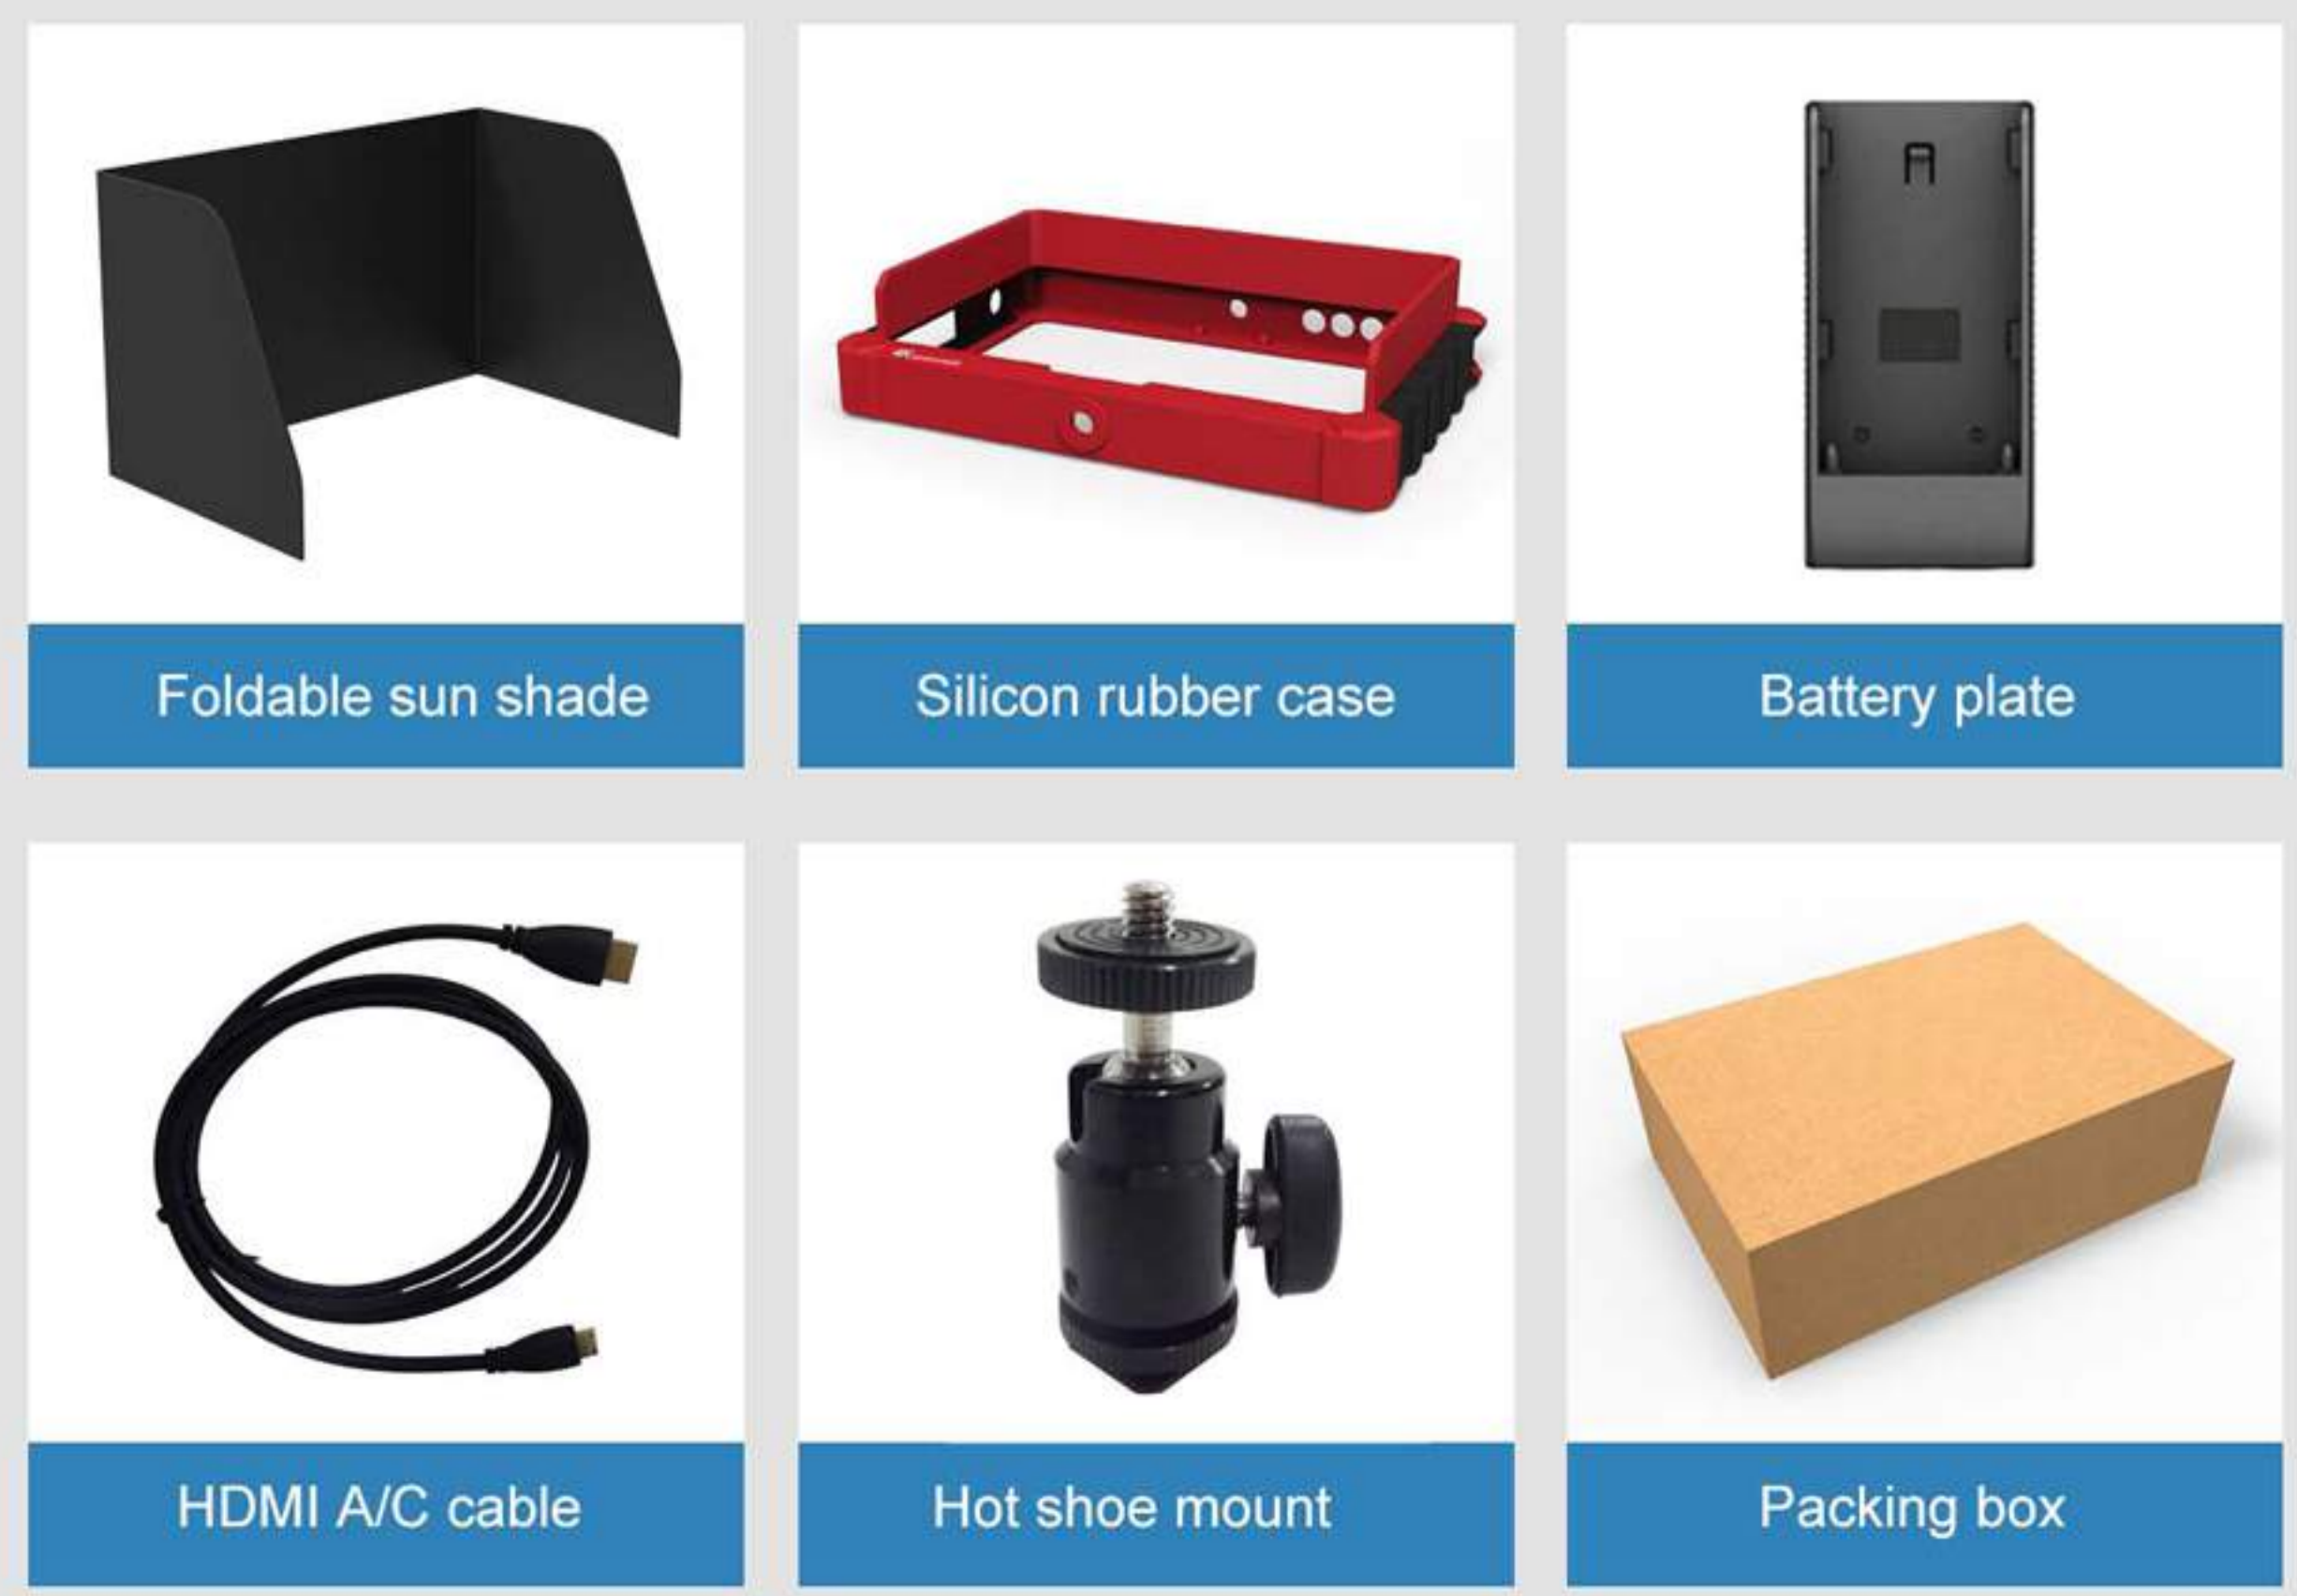

Note: Due to constant effort to improve products and product features, specifications may change without notice.

