

CT500HO

4K CAMERA ASSIST

1920×1080 Resolution | 4K HDMI | 118g

Broadcast monitor for 4K/Full HD camcorder & DSLR
Application for taking photos & making movies



A Better Camera Mate

CT500HO matches with world-famous 4K/FHD camera brands, to assist cameraman in better photography experience.

8bit Full HD Display



- 5" 16:9 8bit IPS LCD panel with 1920×1080 native resolution (441ppi), enjoy sharper, more detailed image with richer colors than ever before.
- 1000:1 high contrast, 400cd/m² high brightness and 170° wide viewing angles, for excellent viewing experience.

4K HDMI Input & Loop Output

- 4K HDMI format supports 4096×2160 24p / 3840×2160 (23/24/25/29/30p)
- HDMI signal can loop output to the other monitor or device when HDMI signal input to CT500HO.

Wide Color Gamut

The wide color space supporting ITU-R BT.709, matching with strict color calibration that makes accurate color reproduction and excellent grayscale.

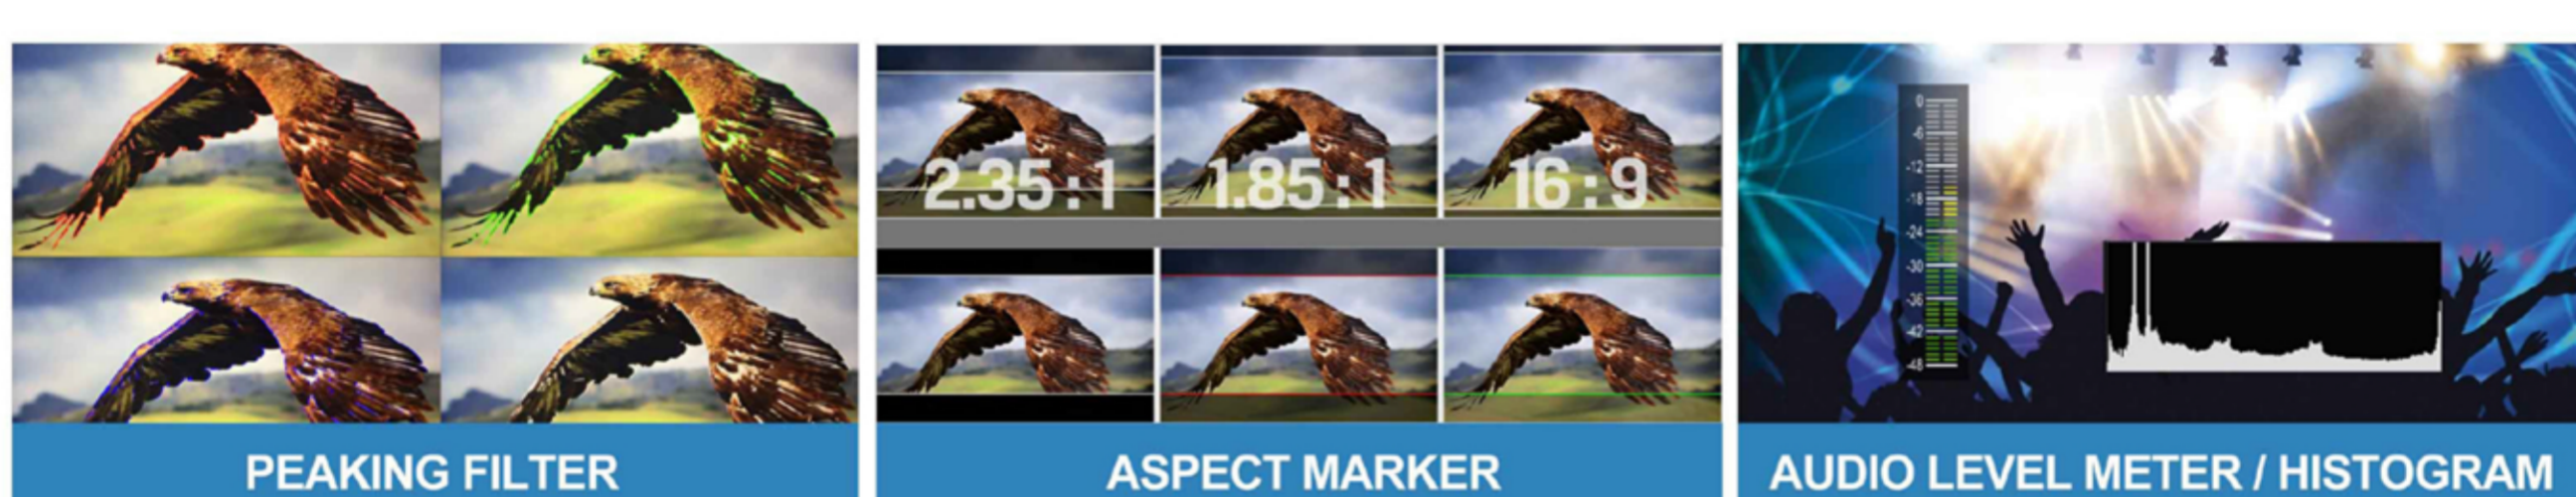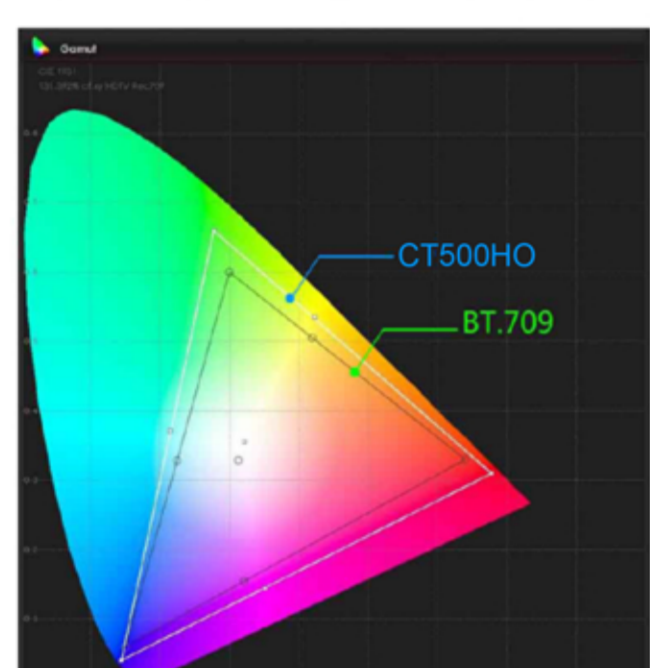

Camera Auxiliary Functions

CT500HO provides plenty of auxiliary functions for taking photos and making movies, such as peaking, false color and audio level meter.




Dual-purpose Battery Plate

Compatibility with two different types of lithium batteries for one battery plate. Providing long-time working condition for cameraman in shooting applications.



Sony F970 Battery

Providing about 3-4 hours working time no matter indoor, outdoor or handheld applications.

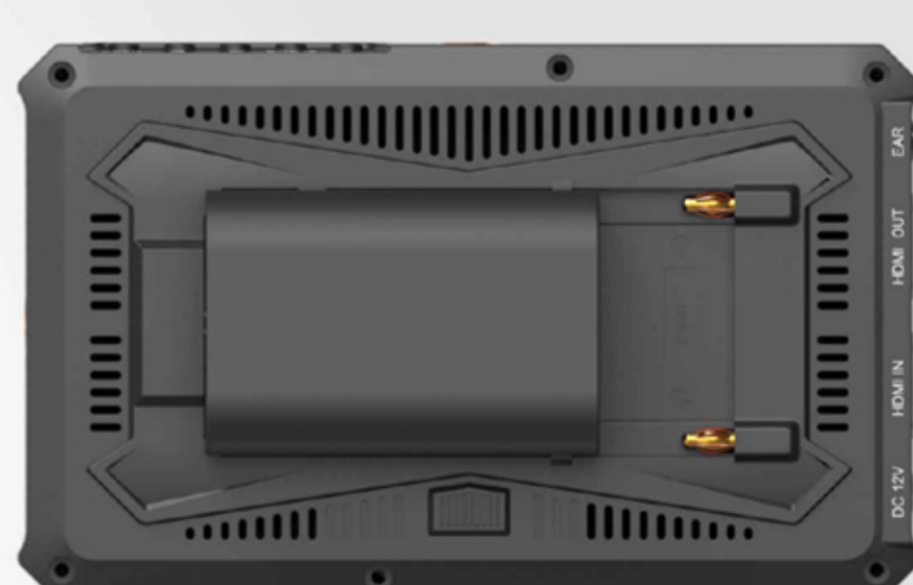

Canon LP-E6 Battery

Providing about 1-2 hours working time no matter indoor, outdoor or handheld applications.




118g Light-weight Design

Makes great convenient for cameraman in outdoor or handheld applications.
Hot shoe mounts to fix CT500HO on the top of camera or camcorder.

SPECIFICATIONS | ACCESSORIES

DISPLAY	Display Screen	5" 8bit IPS
	Physical Resolution	1920×1080 (441ppi)
	Aspect Ratio	16:9
	Brightness	400cd/m ²
INPUT OUTPUT	Contrast	1000:1
	Viewing Angle	170°/170°(H/V)
AUDIO	HDMI	1
	Speaker	1
POWER	Ear Phone Slot	1
	Current	600mA (12V)
	Input Voltage	DC 7-24V
	Battery Support	Sony F970 / Canon LP-E6
ENVIRONMENT	Power Consumption	≤9W
	Operating Temperature	-20℃~50℃
	Storage Temperature	-30℃~70℃
DIMENSION	Dimension (LWD)	129.6×80.1×23.6mm
	Weight	118g
HDMI FORMAT	4K HDMI	4096×2160 24p / 3840×2160 (23/24/25/29/30p)

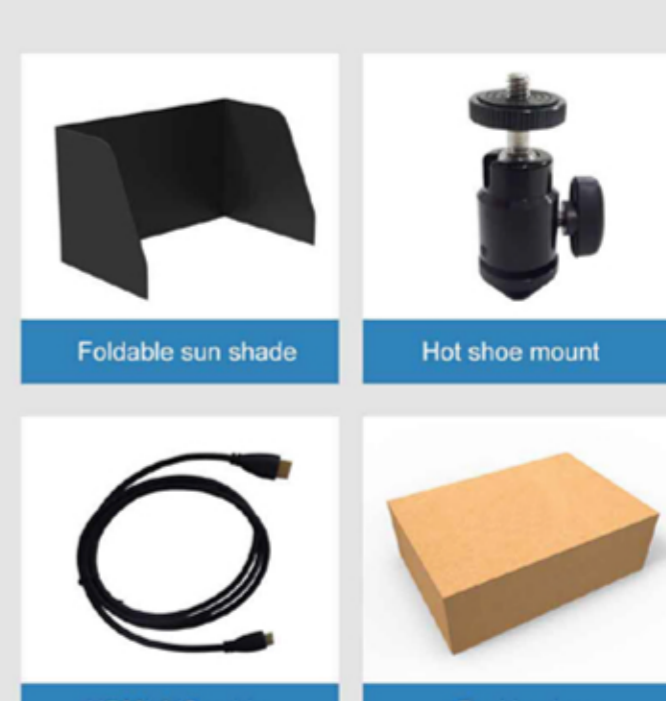

Note: Due to constant effort to improve products and product features, specifications may change without notice.